


2023

PRODUCT CATALOG



SINCE 1938

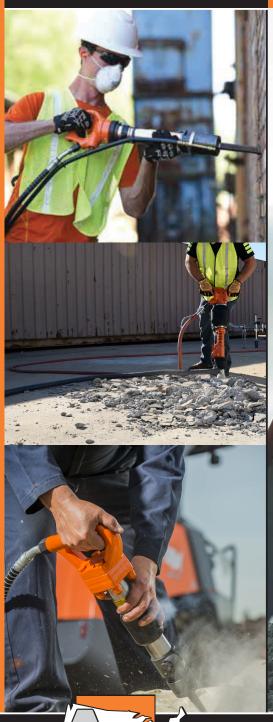

PROVEN POWER. RUGGED RELIABILITY. APT is a leading provider of outstanding tools for the construction and industrial markets. The APT brand has been synonymous with quality since 1938.

APT is a leading provider of exceptional tools for the construction and industrial markets. For decades, the APT brand has represented quality, performance, and innovation in the pneumatic tool industry. APT's product line now offers a complete range of pneumatic tools, hydraulic tools and portable power. Superior performance, excellent product reliability, competitive pricing, ergonomic designs, and a great warranty are what make APT an industry leader.

The products and parts are made in various countries by APT's affiliates and/or trusted suppliers.

Worldwide Customer Support

Choosing APT is just the beginning. APT distributors offer reliable service and support. Genuine spare parts for your tools are available worldwide, with short delivery times. Refer to website for warranty, terms and conditions, and return policy information.

Order Desk Hours

Monday through Friday | 6:00 a.m. to 4:00 p.m. PacificTime (U.S. & Canada) | 8:00 - 16:00 UTC

HANDHELD PNEUMATIC





Paving Breakers

Features

- Patented ball valve design* (U.S. pat. #8,276,682 B2)
- Drop-forged alloy steel handle Standard universal air fitting
- Built-in automatic oiler
- Rubber handle grips
- · Latch-type retainer
- Swivel hose connection
- Noise-dampening mufflers available
- · Four-bolt backhead
- Replaceable chuck bushing (except for model 140/140A)

MODEL	CHUCK SIZE In.	BORE IN.	STROKE IN.	ВРМ	CFM @90PSI	WEIGHT LBS.	LENGTH IN.	AIR INLET NPT
M117	⁷ / ₈ x 3- ¹ / ₄ ⋅ 1 x 4- ¹ / ₄	1-3/4	3-3/8	1,850	34-48	33	21-¾	3/4 male
M140	1 x 4-1/4	1-7/8	4-1/4	1,500	48	43	21-1/8	½ male
M160	1-1/8 x 6 · 1-1/4 x 6	2-1/4	4-1/8	1,680	60-65	68	25-¾	½ male
M190	1-1/8 x 6 · 1-1/4 x 6	2-5/8	6-1/8	1.350	75-80	91	29	3/4 male

^{*}Ball valve used on Models 117, 160, and 190.



160A

Airgo-Line®

140A

 $\textit{Airgo}\text{-}\mathsf{Line}^{\circledR}$

Airgo-Line® **Paving Breakers**

40 lb., 60 lb., 90 lb. classes

Features

- · Patented ball valve design* (U.S. pat. # 8,276,682 B2)
- · Ergonomic handle dampens vibration; reduces shock to the operator
- Same hitting power as standard breaker, reduces operator fatigue
- · Replaceable vibration isolator

· Handle is interchangeable with APT standard model

MODEL	CHUCK SIZE In.	BORE IN.	STROKE IN.	ВРМ	CFM @90PSI	WEIGHT LBS.	LENGTH IN.	AIR INLET NPT
M140A	1 x 4-1/4	1-7/8	4-1/4	1,500	48	46	24	½ male
M160A	1-1/8 x 6 · 1-1/4 x 6	2-1/4	4-1/8	1,680	60-65	70	28-1/4	½ male
M190A	1-1/8 x 6 · 1-1/4 x 6	2-5/8	6-1/8	1,350	75-80	90	31	¾ male



Rock Drills

Airgo-Line® backhead assemblies



190A

Airgo-Line®

Features

Model 109 - 9 lb. class

- Clockwise rotation
- Stop-rotation feature
- Lightweight cast alum. handle
- · Built-in automatic oiler

Model 115 - 15 lb. class

- Stop-rotation feature
- Counterclockwise rotation
- Built-in automatic oiler
- Model 115 cont.
- Latch-type retainer
- Lightweight cast alum. handle

Model 137 - 30 lb. class

- 4 drilling speeds
- Replaceable piston stem bearing
- Available wet or dry
- Counterclockwise rotation

Model 137 cont.

• Rubber handle grips

Model 155 - 60 lb. class

- 3 drilling speeds
- Replaceable piston stem bearing
- Built-in automatic oiler
- Available wet or dry
- Counterclockwise rotation
- Rubber handle grips

MODEL	CHUCK SIZE In.	BORE IN.	STROKE IN.	ВРМ	CFM @90PSI	WEIGHT LBS.	LENGTH IN.	AIR INLET NPT
M109	3/4 x 3-3/4 Round Slotted	1-1/4	1	3,400	19-21	9	15	% female
M115	⁷ / ₈ x 3- ¹ / ₄	1-15/16	1-3/8	2,900	32-36	19	18-3/8	3% male
M137‡	⁷ / ₈ x 3-½ or 4-½ 1 x 4-½	2-3/8	2-5/8	2,300	85-90	38	19-¾	½ male
M155	⁷ / ₈ x 3- ¹ / ₄ or 4- ¹ / ₄ 1 x 4- ¹ / ₄	2-5/8	3	2,100	110-120	61	22-¾	¾ male

‡No built-in automatic oil reservoir - constant feed oiler recommended.





Clay/Trench Diggers

Features

Deep case-hardened alloy steel cylinders
 Replaceable chuck bushing
 Latch-type retainer

Model 118 Clay Digger

- Patented ball valve design (U.S. pat. # 8,276,682 B2)
- · Built-in automatic oiler
- D-style handle
- Inside trigger for better control and safety

Model 119 Trench Digger

- Patented ball valve design (U.S. pat. # 8,276,682 B2)
- · Built-in automatic oiler
- T-style forged handle
- Rubber handle grips

Model 125 Clay Digger

- D-style handle
- · Inside trigger for better control and safety
- Flapper valve design allows dirt to pass without stopping tool
- · Replaceable chuck and piston stem bushing

MODEL	CHUCK In.	BORE IN.	STROKE In.	ВРМ	CFM @90PSI	WEIGHT LBS.	LENGTH IN.	AIR INLET NPT
M118	⁷ / ₈ x 3- ¹ / ₄ ⋅ 1 x 4- ¹ / ₄	1-3/4	3-3/8	1,850	34-36	31	21-1/2	3/8 male
M119	⁷ / ₈ x 3- ¹ / ₄ ⋅ 1 x 4- ¹ / ₄	1-3/4	3-3/8	1,500	34-38	37	31	½ female
M125	⁷ / ₈ hex x 3- ¹ / ₄	2-1/4	4-1/8	1,680	38-42	21	18-¾	½ female



Rivet Busters/Demolition Tools

Features

• New closed-nose cylinder captivates the piston, thus adding an extra layer of safety. Includes traditional retainer system.

- Choice of 2 handle styles, available in all stroke sizes:
 - New pistol-grip style handle with
 - outside trigger
 Classic "D" handle with inside trigger
- Three stroke sizes: 6", 8" and 11"
- All models use jumbo extra heavy-duty (11x) steel
- 6' steel-braid reinforced whiphose, 1/2" NPT, and air fitting included with every tool

MODEL	HANDLE STYLE	BORE IN.	STROKE IN.	ВРМ	CFM @90PSI	WEIGHT LBS. W/RETAINER	LENGTH IN. W/RETAINER	AIR INLET NPT
M633CN	D Handle	1-3/16	6	1,100	42-46	29	20-1/2	½ female
M633CN	Pistol Grip	1-3/16	6	1,100	42-46	28	21	½ female
M133CN	D Handle	1-3/16	8	1,140	42-46	32	22-1/2	½ female
M133CN	Pistol Grip	1-3/16	8	1,140	42-46	31	23	½ female
M1133CN	D Handle	1-3/16	11	850	48-52	35	25-1/2	½ female
M1133CN	Pistol Grip	1-3/16	11	850	48-52	34	26	½ female

650 Pistol M43/44 Grip

Part #	Retainers
9431	Standard oval retainer (7022 with 1941 spring)
5550	Quick change/ball retainer w/1941 spring – optional
18290	Bolt-on quick change/ball retainer – optional

Chipping Hammers

Features

- Deep case-hardened alloy steel cylinders
- Drop-forged handles
- All models are 7/8" 24 fine thread
- Replaceable bushing
- Adjustable exhaust deflector
- Price includes oval retainer, locking spring and whiphose assembly - 7/8" - 24 male swivel, 6' steel-braid reinforced whiphose and air fitting

260 & M43/44 Series

- 2-bolt and 4-bolt handle for ease of maintenance
- Patented ball valve design (U.S. pat. # 8,276,682 B2)
- · Forgiving of dirt and debris, corrosion resistant
- Available in 3" and 4"strokes

650 Series

- Flapper valve design allows dirt to pass without stopping the tool
- Traditional pistol grip handle
- Available in 2", 3" and 4" strokes

MO	DEL	BORE IN.	STROKE IN.	ВРМ	CFM @90PSI	WEIGHT LBS. W/O RETAINER	LENGTH IN. W/O RETAINER	CHUCK BUSHING	AIR INLET
050	M652	1-1/8	2	2,100	32-34	12	13-1/4	.680 Round or .580 Hex	⁷ ∕8-24
650 SERIES	M653	1-1/8	3	1,650	33-35	14	15-1/4	.680 Round or .580 Hex	7/8-24
OLIVILO	M654	1-1/8	4	1,375	34-36	16	16	.680 Round or .580 Hex	7∕8-24
260	M263	1-1/8	3	1,650	33-35	14	14-9/16	.680 Round or .580 Hex	⁷ / ₈ -24
SERIES 2-BOLT	M264	1-½	4	1,375	34-36	15	15-%16	.680 Round or .580 Hex	7⁄8-24
M43/44	M43	1-1/8	3	1,650	33-35	21	16-¾	.680 Round or .580 Hex	7/8-24
SERIES	M44	1-1/8	4	1,375	34-36	22	17-¾	.680 Round or .580 Hex	7/8-24

HANDHELD PNEUMATIC



Features

- · Built-in large automatic oiler
- Flapper valve design allows dirt to pass without stopping the tool
- Internally reinforced large malleable 6" iron butt (standard)
- Pole butt (half-moon), and 3" diameter butt available



MODEL		STROKE IN.	ВРМ	CFM @90PSI	WEIGHT LBS.	LENGTH IN.	AIR INLET NPT
M131	1-1/2	5-1/2	670	38-42	37	51-7/8	½ female

Needle Scalers

Model 307 / 317

- · Rubber-faced throttle valve for nositive seal
- Lever-type throttle for easy control
- · Alloy steel cylinder
- · Assembly of 19 seven-inch steel needles, with attachment housing
- Optional chisel accessories sold separately (3 included in M317 kit)

MODEL	ВРМ	CFM @90PSI	WEIGHT LBS.	LENGTH IN.	AIR INLET NPT
M307/M317	4,000	7	6.7	18-1/2	1/4 female
M121	4,500	5.5	4	11-3/4	1/4 male



M317 chisels (included in M317 kit, or sold separately)



Retrofit Dust Suppression Spray Kit

- 36" retrofit kit that can be attached to any size tool (Breakers, Rivet Busters, and Chipping Hammers)
- Equipped with 6 GPH atomized water(or mist) nozzle that can cover 80 degree cone around the tool at 40 psi
- Connects to garden hose making it simple to utilize any water source on the jobsite
- Part no. 9753300015

Air Tool Accessories

(R) = Recommended (O) = Optional (S) = Standard

Needle Scalers

18743 (R) WHIPHOSE ASSY (UF, OL, 3/8" hose x 6ft, 1/4" NPT male)

Rivet Busters

18837 (R) WHIPHOSE ASSY (UF, 2L, 1/2" Braided Hose x 6ft, 1/2" NPT Swivel)

18836 (O) WHIPHOSE ASSY (UF, 1L, 1/2" Braided Hose x 6ft, 1/2" NPT Swivel)

18833 (O) WHIPHOSE ASSY (UF, ½" Braided Hose x 6ft, with ½" NPT Swivel)

Chipping Hammers

18835 (S) WHIPHOSE ASSY (UF, 1L, ½" Braided Hose x 6ft, ½"-24 Swivel)

18832 (S) WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, with 7/8"-24 Swivel)

18833 (Old-Style-Coarse Thread) WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, with 1/2" NPT Swivel)

109 Rock Drill

18841 **(R)** WHIPHOSE ASSY (UF, 1L, ½" Braided Hose x 6ft, ¾" NPT Male)

18839 (O) WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, 3/8" NPT Male)

115 Rock Drill

18842 **(R)** WHIPHOSE ASSY (UF, 1L, ½" Braided Hose x 6ft, 3/8" NPT Female)

18840 (O) WHIPHOSE ASSY (UF, ½" Braided Hose x 6ft, 3/8" NPT Female)

131 Backfill Tamper

18838 **(R)** WHIPHOSE ASSY (UF, 2L, ½" Braided Hose x 6ft, ½" NPT Male)

18834 (O) WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, 1/2" NPT Male)

117 Paving Breaker

18842 **(R)** WHIPHOSE ASSY (UF, 1L, ½" Braided Hose x 6ft, ¾" NPT Female)

18840 (O) WHIPHOSE ASSY (UF, ½" Braided Hose x 6ft, 3/8" NPT Female)

119 Trench Digger

18838 **(R)** WHIPHOSE ASSY (UF, 2L, ½" Braided Hose x 6ft, ½" NPT Male)

18834 (O) WHIPHOSE ASSY (UF, 1/2" Braided Hose x 6ft, 1/2" NPT Male)

118 Clay Digger

18842 **(R)** WHIPHOSE ASSY (UF, 1L, ½" Braided Hose x 6ft, 3/8" NPT Female)

18840 (O) WHIPHOSE ASSY (UF, ½" Braided Hose x 6ft, 3/8" NPT Female)

125 Clay Digger

18837 **(R)** WHIPHOSE ASSY (UF, 2L, ½" Braided Hose x 6ft, ½" NPT Male)

18834 (O) WHIPHOSE ASSY (UF, ½" Braided Hose x 6ft, ½" NPT Male)

Whiphose For 137 & 155 Rock Drill

1280583710 8' WHIPHOSE ASSY 3/4" HOSE, CONSTANT-FEED OILER & (2) UNIVERSAL COUPLINGS

Whiphose For 190 Paving Breaker

1280583711 10' 3/4" WHIPHOSE W/2L OILER & UNIVERSAL COUPLINGS

NOTE: For enhanced performance and longer life when using Paving Breakers, APT recommends the 18331 3/4" whiphose with oiler, which provides an inline oiler within 10' of the operating tool for efficient lubrication.

Safety Cables		APT C	Dilers	Muffle	Muffler Kits		
18754	Hose to Hose	18307	OL 1.4 OZ. (X small)	6465	(M117, M118, M119)		
18755	Hose to Tool	17755	1L 3.7 OZ. (small)	18099	(M140)		
		17756	2L 11.0 OZ. (med)	17752	(M160)		
		17757	3L 16.0 OZ. (large)	17753	(M190)		
		18646	2L- Constant Feed	18756	(M155)		
			for Rock Drills				

O-Ring Seal & Repair Kits 18774 (M117)

18775 (M140) 18776 (M140A) 18777 (M160)

18778 (M160A) 18779

with housing

Carrying case

(M180, M190) 18780 (M180A, M190A)

18781 (M109) 18782 (M115)

18783 (M137) 18784 (M155)

18785 (M633, M133, M1133)

18786 (M263, M264) 18787 (M652, M653, M654)

18788 (M118) 18789 (M119)

18790 (M125) (M131)

(M307 Scaler, M317 Scaler Kit) 18793

Side Rod Kits & Latch Kits

18299 Side Rod Kit (M140) Side Rod Kit (M160, M180) 18298 18581 Side Rod Kit (M190)

18796 Side Rod Kit (M109) 18797 Side Rod Kit (M115) 18798 Side Rod Kit (M137)

18799 Side Rod Kit (M155)

18794 Latch Kit (M115)

18295 Latch Kit (M117, M118, M119, M125) 18301 Latch Kit (M140)


Latch Kit (M160, M180, M190) 18296

18741 Standard Rivet Buster Kit (with

black bumper) M633, M133, M1133 Optional Rivet Buster Kit (with orange bumper) M633, M133, M1133



Notes:			

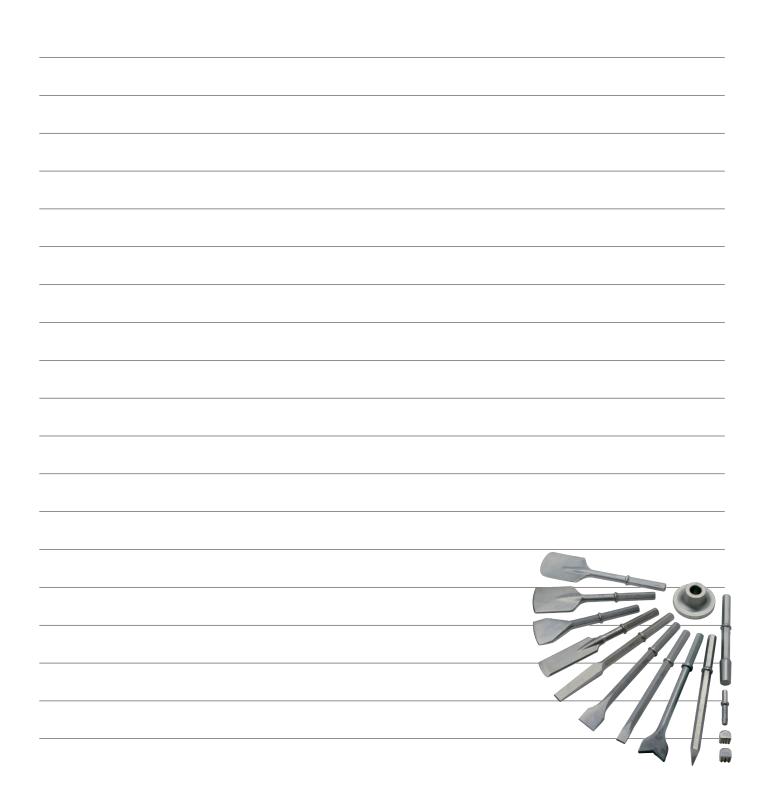

APT Regional Sales Managers Map

